

Lödal

EVO Series

ECO Series

Front Loader

Bucket Loader

In The News

Sales & Service

Plant Tour

Contact Us

Front Loader

LAM Front Loader

It's better built.
It's more efficient.
It will save you money.
It will make you money.



Model Codes

TC = One Point
(Triangle) Hookup
TF = Two Point
(Fork) Hookup

Standard Compaction


Loader Model	TC or TF-1026	TC or TF-1030	TC or TF-1034
Body Size	26 cu. yd.	30 cu. yd.	34 cu. yd.
Body Weight	18,000 lbs.	18,225 lbs.	18,450 lbs.
Hopper Capacity	10.5 cu. yd.		
Lift Capacity	10,000 lbs.		
Tailgate Capacity	1 cu. yd.	5 cu. yd.	9 cu. yd.
Oil Reservoir	55 gal.		

Model Codes

TC = One Point (Triangle) Hookup
TF = Two Point (Fork) Hookup

High Compaction

Loader Model	TC or TF-1034 HC	TC or TF-1038 HC
Body Size	34 cu. yd.	38 cu. yd.
Body Weight	21,375 lbs.	21,700 lbs.
Hopper Capacity	10.5 cu. yd.	
Lift Capacity	10,000 lbs.	
Tailgate Capacity	5 cu. yd.	9 cu. yd.
Oil Reservoir	70 gal.	

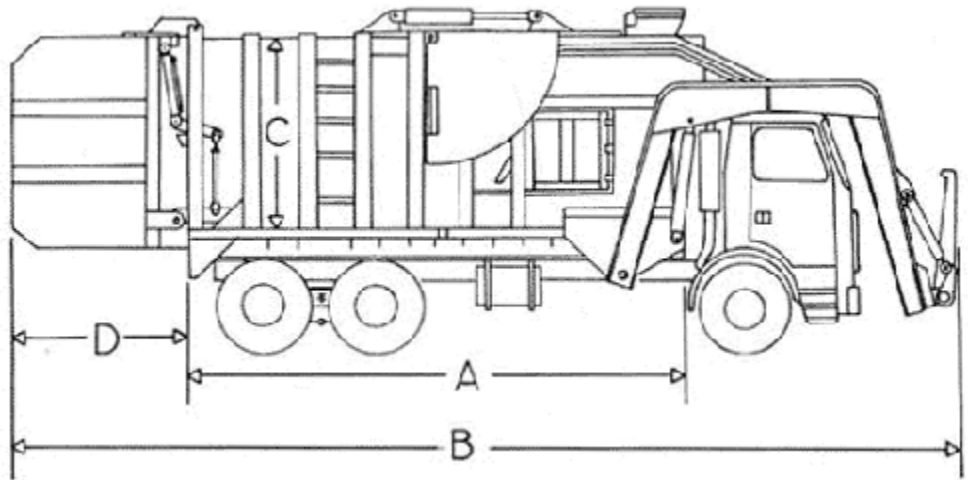

Dimensional Data:

Body Size	Overall Width	(A) Body Length	(B) Overall Length	Hopper Opening	Inside Width	(C) Inside Height	(D) Tailgate Length
26 cu. yd.	96 in.	209 in.	340 in.	81W X 87L	81 in.	83 in.	12 3/4 in.
30 cu. yd.	96 in.	209 in.	364 in.	81W X 87L	81 in.	83 in.	36 in.
34 cu. yd.	96 in.	209 in.	390 in.	81W X 87L	81 in.	83 in.	62 1/2 in.
HC 34 cu. yd.	96 in.	235 in.	394 in.	81W X 87L	81 in.	83 in.	36 in.
HC 38 cu. yd.	96 in.	235 in.	420 in.	81W X 87L	81 in.	83 in.	62 1/2 in.

Chassis Requirements:

Body Size	Wheel Base	Front Axle	Tandem Rear Axle	Minimum GVWR	Total Frame From Cab
26 cu. yd.	161 in.	18,000 lbs.	34,000 lbs.	52,000 lbs.	255 in.
30 cu. yd.	167 in.	18,000 lbs.	38,000 lbs.	56,000 lbs.	255 in.
34 cu. yd.	173 in.	18,000 lbs.	44,000 lbs.	62,000 lbs.	255 in.
HC 34 cu. yd.	173 in.	18,000 lbs.	44,000 lbs.	62,000 lbs.	280 in.
HC 38 cu. yd.	181 in.	18,000 lbs.	46,000 lbs.	64,000 lbs.	280 in.



Standard Equipment Specifications:

- Automatic Hydraulically Actuated One Piece Hopper Cover
- Hopper Doors and Body Compactor Interlock Controls
- Top Hinged hydraulically Opened Tailgate
- Hydraulically Operated Tailgate Locks
- LH Body Side Door
- Body Side ladder
- Rung Type Step Under Body Side Door
- Tailgate Open Indicator Alarm
- Rear and Front Tandem Mud Flaps
- Weatherproof Switches with Cold Weather Seals
- Positive Rod Controls Self-Connecting and Disconnecting
- Polyurethane Paint

Popular Options:

- Air Operated Rear Hopper Flipper
- Triangle for Single Point Hookup
- Two Piece Hopper Covers
- Sliding Hopper Cover
- Cab-O-Scope
- Cab Protector
- Windshield Guard
- 1/4" Hi Tensile Steel Floor
- 3/16" Hi Tensile Steel Body Side Walls
- Tailgate Bumper
- Air Operated Front & Rear Hopper Flipper
- 3/16" Bustle Tailgate in lieu of Std. 10 Ga.
- Vertical Tilt Forks
- Container Self Leveling
- Cable or Air Controls
- Front Mounted Pump Drive Options
- In-Cab Tailgate Control Lever
- Various Lighting Packages Available
- Chassis Frame Mounter Reservoir

